
Base Build Up for BoundWorx® Resin Bound using BoundBase

This document gives guidance on a typical base build up for pedestrianised and light vehicle areas with a permeable base using the BoundBase system.

ALL BASE DETAILS ARE INTENDED AS A GUIDE ONLY AND DO NOT CONSTITUTE A SPECIFICATION

BoundWorx® Resin Bound 15mm-18mm	BoundWorx® Resin: 15mm Pedestrian 18mm Light vehicle for larger vehicles or heavily trafficked areas*
BoundBase® Mesh	2mm
BoundBase®	30mm Pedestrian & Light vehicle
BoundBase® Mesh	2mm
Sub-base 100-150mm	Well compacted Type 3 Crushed Limestone 100mm Pedestrian 150mm Light vehicle

*For areas that are intended for use by large vehicles or more heavily trafficked, please contact us for advice on depth.

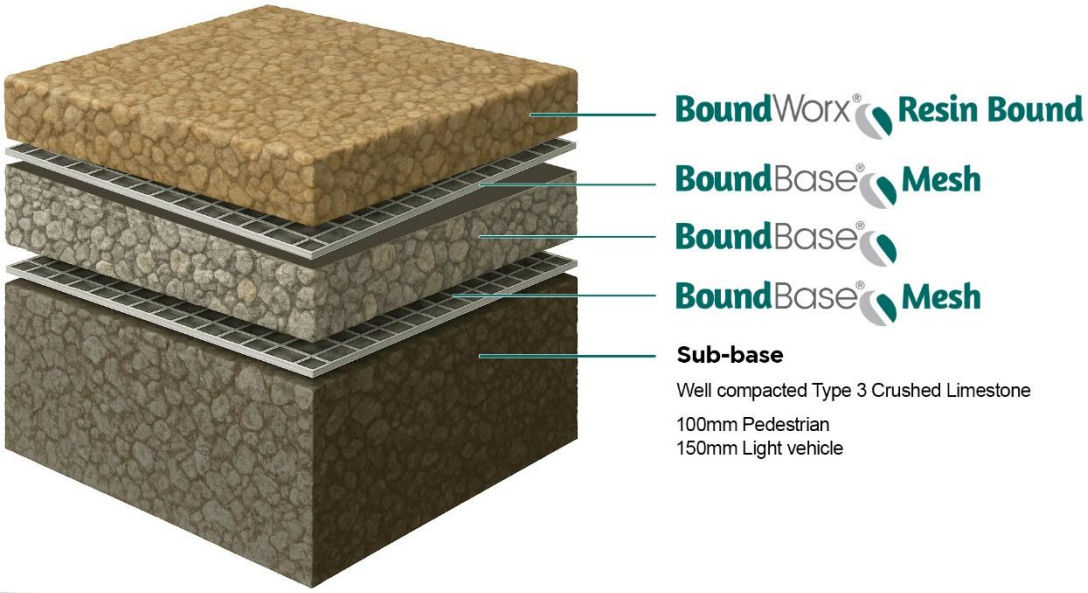

Unit F1, Birdineye Farm, Framfield Road, Uckfield, TN22 5HA
Tel: 01825 891329 | Email: info@resinbonded.co.uk

BoundWorx® Resin Bound can be applied onto the BoundBase System. Movement from the base below the BoundBase system is the installers responsibility and may cause issues with the finished surface above.

Any advice, recommendation or information given by Resin Bonded Ltd is based on practical experience and is believed to be accurate at the time of publication, no liability or responsibility of any kind (including liability for negligence) is accepted in this respect by the company, its Servants, or Agents.

The figures quoted do not constitute a specification. They represent typical values obtained for this product.

Unit F1, Birdineye Farm, Framfield Road, Uckfield, TN22 5HA
Tel: 01825 891329 | Email: info@resinbonded.co.uk